



# GEOS F493 / F693

## Geodetic Methods and Modeling

### – Lecture 10a: Modeling Plate Kinematics –


Ronni Grapenthin  
rgrapenthin@alaska.edu  
Elvey 413B  
(907) 474-7286

November 04, 2019

# Guess The Process

## P299 (Duckworth\_CN2007) NAM08

Processed Daily Position Time Series

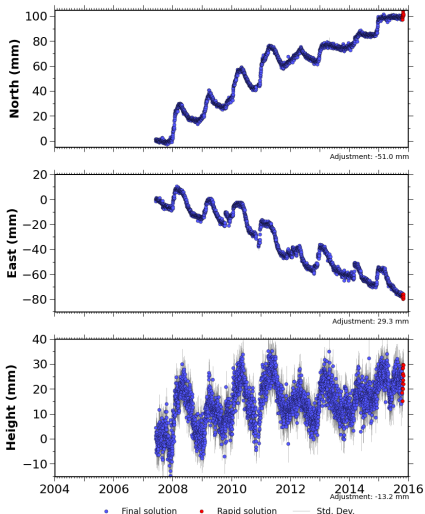


Source file: P299.gbo.nam08.pos Last epoch plotted: 2015-11-02 12:00:00

# Guess The Process

## P299 (Duckworth\_CN2007) NAM08

Processed Daily Position Time Series

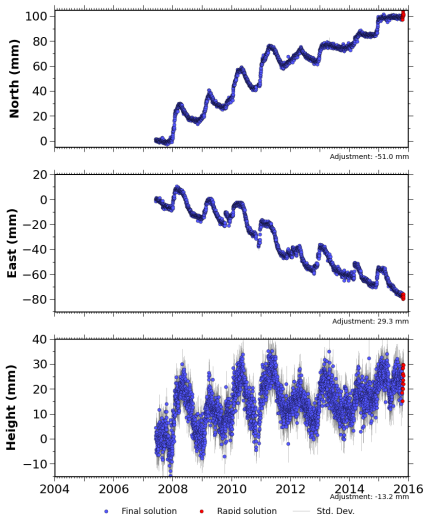


Source file: P299.gbo.nam08.pos Last epoch plotted: 2015-11-02 12:00:00



# Guess The Process

## P299 (Duckworth\_CN2007) NAM08

Processed Daily Position Time Series

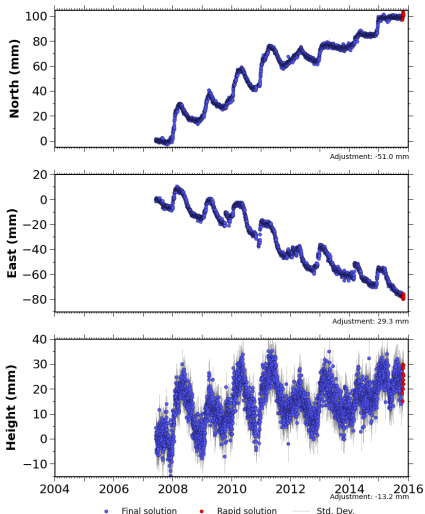

Source file: P299.gbo.nam08.pos Last epoch plotted: 2015-11-02 12:00:00



# Guess The Process


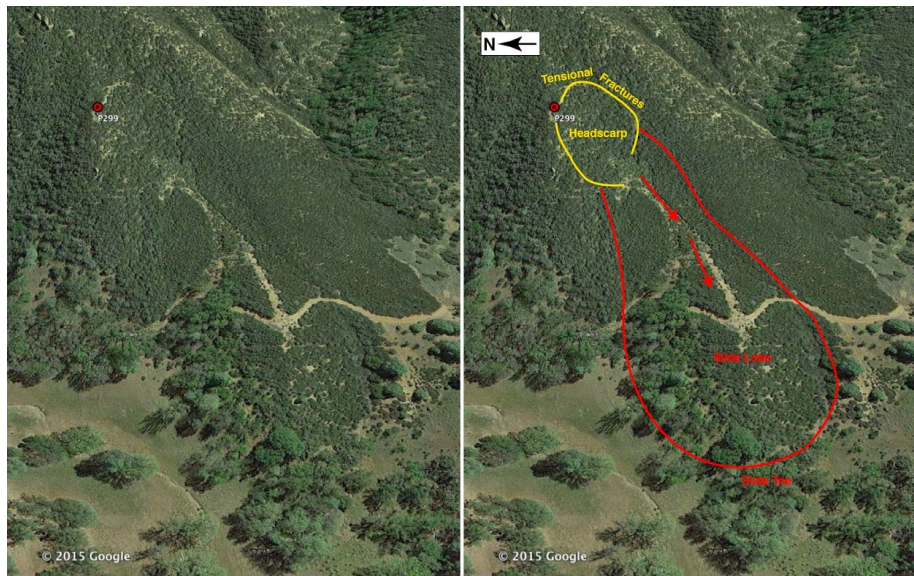


Figure 3. GoogleEarth view of P299 and landslide. The slide originates in the small bowl to the south of P299 and flow downhill into a lobe at the base. Original image (left) has been annotated to show extent of slide (right).

# Tectonic Activity



**DIGITAL TECTONIC ACTIVITY MAP OF THE EARTH**  
Tectonism and Volcanism of the Last One Million Years  
**DTAM - 1**

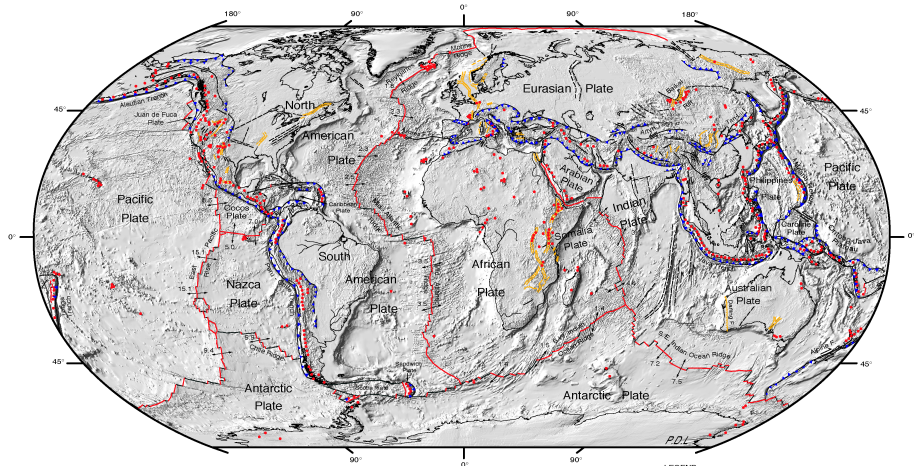

NASA/Goddard Space Flight Center  
Greenbelt, Maryland 20771

Robinson Projection  
October 2002


- LEGEND**
- Actively-spreading ridges and transform faults
  - Total spreading rate, cm/year
  - Major active fault or fault zone; dashed where nature, location, or actively uncertain
  - Normal fault or rift; hachures on downthrown side
  - Reverse fault (overthrust, subduction zones); generalized; bars on upthrown side
  - Volcanic centers active within the last one million years; generalized. Minor basaltic centers and seamounts omitted.

# Plates and Boundaries

- plates are rigid, relative motions occur on their boundaries
- how many plates / microplates are there?
- plate boundaries have some finite width: plate boundary zones
  - can be narrow:  $< 10$  km
  - or very wide: 500 – 1000 km
- relative motion occurs on faults, or breaks in the Earth's lithosphere

# Faults


- Faults are (approximately) planar surfaces
- Motion on either side of the surface relative to the other
- Direction of motion is slip direction
- Motion driven by plate tectonics
- Nature of slip depends on depth:
  - shallow: fault stuck together (friction), slip occurs suddenly in earthquakes
  - deep: fault slips mostly at steady rate

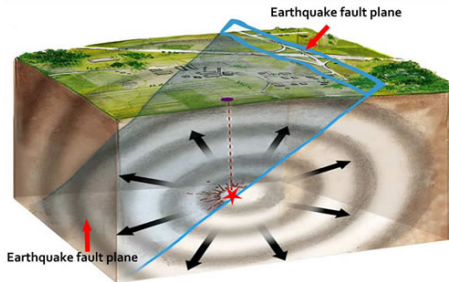

*Valerie Thomas, USGS & Anthony Guarino, Caltech*




# Types of Faults

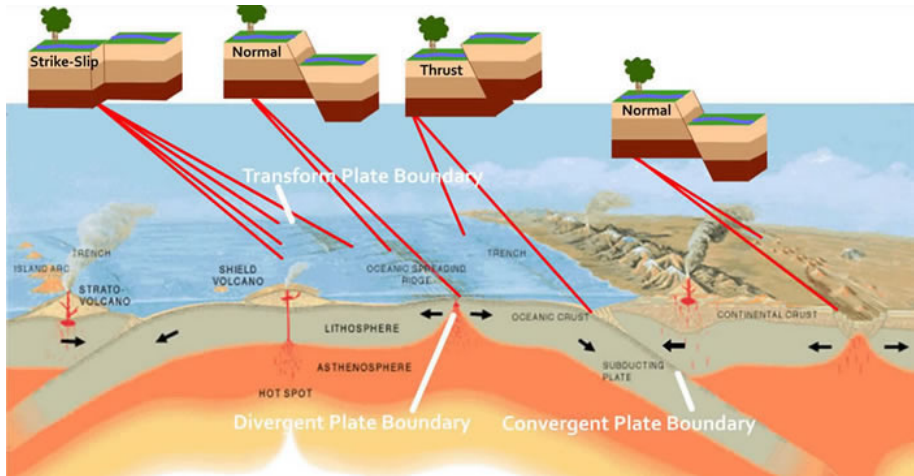

Valerie Thomas, USGS & Anthony Guarino, Caltech


# Motion on a sphere

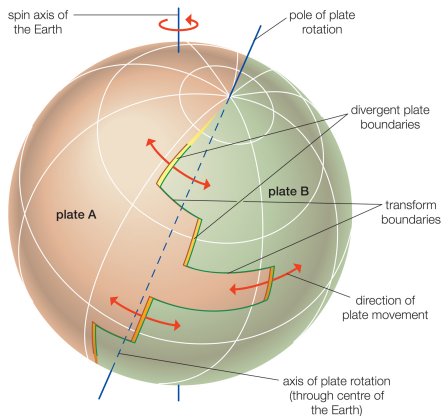

© 2012 Encyclopædia Britannica, Inc.

- rigid motion on sphere is about geometric axis
- 2 equivalent ways to describe:
  - pole of rotation (Euler Pole) and angular speed (deg/Myr)
  - angular velocity vector

# Motion on a sphere

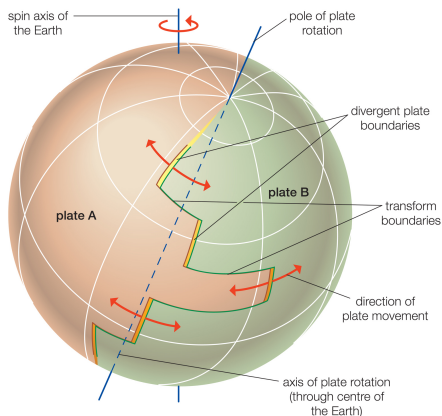


© 2012 Encyclopædia Britannica, Inc.

- relative plate motion direction given by transform fault direction
- transform fault indicates small circle about rotation pole
- relative plate motion rate given by seafloor magnetic isochrons
- GPS velocities are direct measure of plate motion direction and magnitude
- GPS velocities are normal to great circle passing through pole of rotation

# Geologic Plate Motion Models

- Relative plate motion models based on a combination of
  - Mid-ocean ridge spreading rate (from marine magnetic anomalies)
  - transform fault azimuths
  - earthquake slip vectors (hard)
- some plates have little or no data (Caribbean, Philippine Sea Plates)
- Common models: NUVEL-1, revised to NUVEL-1A
- New model: MORVEL (DeMets et al, 2010)

# Motion on a sphere

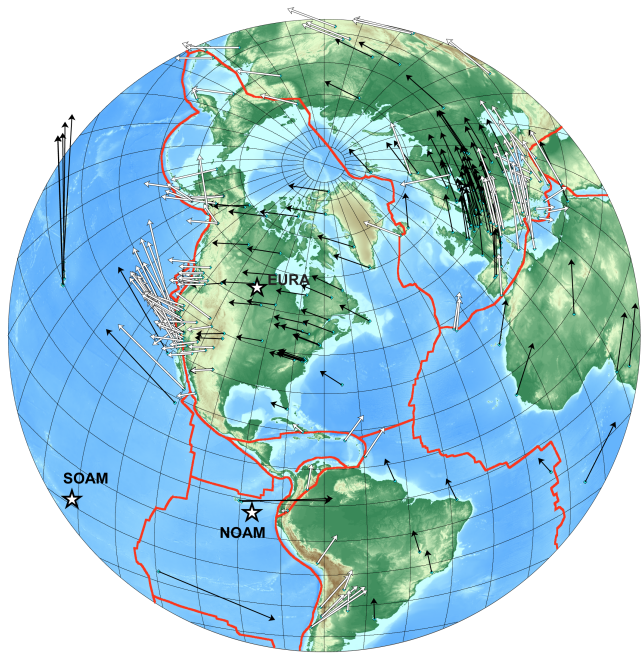

*courtesy: Jeff Freymueller, UAF*

# Conversion between Euler Parameters and Rotation Vector

- Rotation Vector:  $\Omega(\omega_x, \omega_y, \omega_z)$
- Euler Parameters: latitude  $\lambda$ , longitude  $\phi$ , angular speed  $s$
- Euler to Rotation:

$$\omega_x = s \cos(\lambda) \cos(\phi)$$

$$\omega_y = s \cos(\lambda) \sin(\phi)$$

$$\omega_z = s \sin(\lambda)$$

- Rotation to Euler:

$$\lambda = \arctan \left( \frac{\omega_z}{\sqrt{\omega_x^2 + \omega_y^2}} \right)$$

$$\phi = \arctan \left( \frac{\omega_y}{\omega_x} \right)$$

$$s = \sqrt{\omega_x^2 + \omega_y^2 + \omega_z^2}$$

# Calculating Site Velocities

- Easiest to use angular velocity vector to compute site velocities
- Cross product of site location  $P$  (ECEF:  $P = [X,Y,Z]$ ) with plate angular velocity:

$$\vec{v} = \vec{\omega} \times \vec{P}$$

- expand cross product to rewrite as matrix equation:

$$\begin{aligned}\vec{v} &= \vec{\omega} \times \vec{P} \\ &= (Z\omega_y - Y\omega_z)\hat{x} + (X\omega_z - Z\omega_x)\hat{y} + (Y\omega_x - X\omega_y)\hat{z}\end{aligned}$$

# Calculating Site Velocities

- Easiest to use angular velocity vector to compute site velocities
- Cross product of site location  $P$  (ECEF:  $P = [X,Y,Z]$ ) with plate angular velocity:

$$\vec{v} = \vec{\omega} \times \vec{P}$$

- expand cross product to rewrite as matrix equation:

$$\begin{aligned}\vec{v} &= \vec{\omega} \times \vec{P} \\ &= (Z\omega_y - Y\omega_z)\hat{x} + (X\omega_z - Z\omega_x)\hat{y} + (Y\omega_x - X\omega_y)\hat{z} \\ &= \begin{bmatrix} Z\omega_y - Y\omega_z \\ X\omega_z - Z\omega_x \\ Y\omega_x - X\omega_y \end{bmatrix}\end{aligned}$$



# Calculating Site Velocities

- Easiest to use angular velocity vector to compute site velocities
- Cross product of site location  $P$  (ECEF:  $P = [X, Y, Z]$ ) with plate angular velocity:

$$\vec{v} = \vec{\omega} \times \vec{P}$$

- expand cross product to rewrite as matrix equation:

$$\begin{aligned}\vec{v} &= \vec{\omega} \times \vec{P} \\ &= (Z\omega_y - Y\omega_z)\hat{x} + (X\omega_z - Z\omega_x)\hat{y} + (Y\omega_x - X\omega_y)\hat{z} \\ &= \begin{bmatrix} Z\omega_y - Y\omega_z \\ X\omega_z - Z\omega_x \\ Y\omega_x - X\omega_y \end{bmatrix}\end{aligned}$$

$$\begin{bmatrix} \phantom{v_x} \\ \phantom{v_y} \\ \phantom{v_z} \end{bmatrix} = \begin{bmatrix} \phantom{Z\omega_y - Y\omega_z} \\ \phantom{X\omega_z - Z\omega_x} \\ \phantom{Y\omega_x - X\omega_y} \end{bmatrix} \begin{bmatrix} \phantom{\omega_x} \\ \phantom{\omega_y} \\ \phantom{\omega_z} \end{bmatrix}$$

# Calculating Site Velocities

- Easiest to use angular velocity vector to compute site velocities
- Cross product of site location  $P$  (ECEF:  $P = [X,Y,Z]$ ) with plate angular velocity:

$$\vec{v} = \vec{\omega} \times \vec{P}$$

- expand cross product to rewrite as matrix equation:

$$\begin{aligned}\vec{v} &= \vec{\omega} \times \vec{P} \\ &= (Z\omega_y - Y\omega_z)\hat{x} + (X\omega_z - Z\omega_x)\hat{y} + (Y\omega_x - X\omega_y)\hat{z} \\ &= \begin{bmatrix} Z\omega_y - Y\omega_z \\ X\omega_z - Z\omega_x \\ Y\omega_x - X\omega_y \end{bmatrix}\end{aligned}$$

$$\begin{bmatrix} \phantom{0} \\ \phantom{0} \\ \phantom{0} \end{bmatrix} = \begin{bmatrix} \phantom{0} & \phantom{0} & \phantom{0} \\ \phantom{0} & \phantom{0} & \phantom{0} \\ \phantom{0} & \phantom{0} & \phantom{0} \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$

# Calculating Site Velocities

- Easiest to use angular velocity vector to compute site velocities
- Cross product of site location  $P$  (ECEF:  $P = [X,Y,Z]$ ) with plate angular velocity:

$$\vec{v} = \vec{\omega} \times \vec{P}$$

- expand cross product to rewrite as matrix equation:

$$\begin{aligned}\vec{v} &= \vec{\omega} \times \vec{P} \\ &= (Z\omega_y - Y\omega_z)\hat{x} + (X\omega_z - Z\omega_x)\hat{y} + (Y\omega_x - X\omega_y)\hat{z} \\ &= \begin{bmatrix} Z\omega_y - Y\omega_z \\ X\omega_z - Z\omega_x \\ Y\omega_x - X\omega_y \end{bmatrix} \\ \begin{bmatrix} \phantom{v_x} \\ \phantom{v_y} \\ \phantom{v_z} \end{bmatrix} &= \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}\end{aligned}$$

# Calculating Site Velocities

- Easiest to use angular velocity vector to compute site velocities
- Cross product of site location  $P$  (ECEF:  $P = [X,Y,Z]$ ) with plate angular velocity:

$$\vec{v} = \vec{\omega} \times \vec{P}$$

- expand cross product to rewrite as matrix equation:

$$\begin{aligned}\vec{v} &= \vec{\omega} \times \vec{P} \\ &= (Z\omega_y - Y\omega_z)\hat{x} + (X\omega_z - Z\omega_x)\hat{y} + (Y\omega_x - X\omega_y)\hat{z} \\ &= \begin{bmatrix} Z\omega_y - Y\omega_z \\ X\omega_z - Z\omega_x \\ Y\omega_x - X\omega_y \end{bmatrix} \\ \begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} &= \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}\end{aligned}$$

# Calculating Site Velocities

- units:  $\Omega$  usually in  $^{\circ}/Myr$

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$

# Calculating Site Velocities

- units:  $\Omega$  usually in  $^{\circ}/Myr$

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$

- want  $m/yr$ :
  - time-factor:  $10^{-6}$
  - degrees-to-radians-to-arclength:  $\frac{\pi}{180} R$
  - where  $R$  is mean Earth radius:  $R = 6,378,137$  m

# Calculating Site Velocities

- units:  $\Omega$  usually in  $^{\circ}/Myr$

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$

- want  $m/yr$ :
  - time-factor:  $10^{-6}$
  - degrees-to-radians-to-arclength:  $\frac{\pi}{180} R$
  - where  $R$  is mean Earth radius:  $R = 6,378,137$  m
- $\vec{v}$  in geocentric coordinates  $[v_x, v_y, v_z]$  units of  $m/yr$ :

$$\vec{v} = 10^{-6} \frac{\pi}{180} R (\vec{\omega}_{deg/Myr} \times \vec{P})$$

# Calculating Site Velocities

- units:  $\Omega$  usually in  $^{\circ}/Myr$

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$

- want  $m/yr$ :
  - time-factor:  $10^{-6}$
  - degrees-to-radians-to-arclength:  $\frac{\pi}{180} R$
  - where  $R$  is mean Earth radius:  $R = 6,378,137$  m
- $\vec{v}$  in geocentric coordinates  $[v_x, v_y, v_z]$  units of m/yr:

$$\vec{v} = 10^{-6} \frac{\pi}{180} R (\vec{\omega}_{deg/Myr} \times \vec{P})$$

- need location conversion from geodetic to geocentric frame (lat,lon to X,Y,Z)
- need velocity conversion from geocentric to local frame (X,Y,Z to N,E,U)



## Recall: Geodetic to Geocentric

$$X = (N + h)\cos(\lambda)\cos(\phi)$$

$$Y = (N + h)\cos(\lambda)\sin(\phi)$$

$$Z = \left(\frac{a^2}{b^2}N + h\right)\sin(\lambda)$$


$$N = \frac{a^2}{\sqrt{a^2\cos^2\lambda + b^2\sin^2(\lambda)}}$$

$$b = -fa + a$$

- $a$ : semi-major axis of ellipsoid (WGS84: 6378137.0 m)
- $f$ : flattening of ellipsoid (WGS84: 1/298.257223563)
- $b$ : semi-minor axis of ellipsoid
- $\lambda, \phi, h$ : geodetic latitude, longitude, height (above ellipsoid)
- $X, Y, Z$ : ECEF Cartesian coordinates

# Recall: Geocentric to Local


- origin of this datum is point of your choice on the surface of the Earth
- right handed coordinate system:
  - $U$  is vertical. i.e., perpendicular to local equipotential surface, points up
  - $N$  is in local horizontal plane and points to geographic north
  - $E$  is in local horizontal plane and points to geographic east
- as ECEF ( $XYZ$ ) units are meters, local units are meters, too

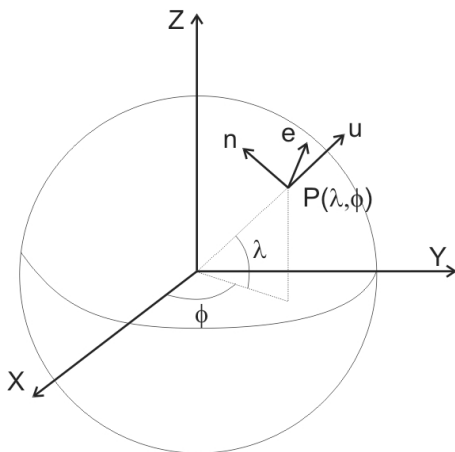

# Recall: Geocentric to Local

Combine 3 rotations to align geocentric with NEU frame:

$$\begin{bmatrix} v_N \\ v_E \\ v_U \end{bmatrix} = \begin{bmatrix} -\sin(\lambda)\cos(\phi) & -\sin(\lambda)\sin(\phi) & \cos(\lambda) \\ -\sin\phi & \cos\phi & 0 \\ \cos(\lambda)\cos(\phi) & \cos(\lambda)\sin(\phi) & \sin(\lambda) \end{bmatrix} \begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix}$$
$$\vec{V}_{local} = R\vec{V}_{ecf}$$

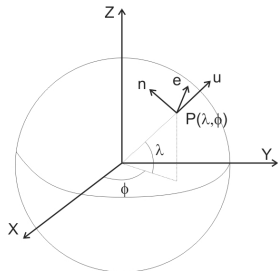

# Recall: Geocentric to Local

Combine 3 rotations to align geocentric with NEU frame:


$$\begin{bmatrix} v_N \\ v_E \\ v_U \end{bmatrix} = \begin{bmatrix} -\sin(\lambda)\cos(\phi) & -\sin(\lambda)\sin(\phi) & \cos(\lambda) \\ -\sin\phi & \cos(\phi) & 0 \\ \cos(\lambda)\cos(\phi) & \cos(\lambda)\sin(\phi) & \sin(\lambda) \end{bmatrix} \begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix}$$
$$\vec{V}_{local} = R \vec{V}_{ecef}$$

- inverse matrix of  $R$  can be used to convert local to ECEF
- since  $R$  is rotation matrix:

$$R^{-1} = R^T$$

- Therefore:

$$\vec{V}_{ecef} = R^T \vec{V}_{local}$$

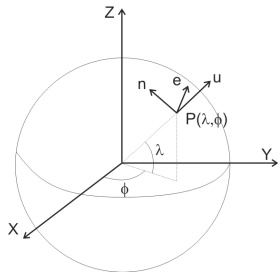

# Estimating Plate Angular Velocity

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$

# Estimating Plate Angular Velocity

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$
$$d = Gm$$

# Estimating Plate Angular Velocity

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$
$$d = Gm$$

- ...

# Estimating Plate Angular Velocity

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$
$$d = Gm$$

- ...
- Invert for  $m$ :

$$\begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix} = (G^T W G)^{-1} G^T W \vec{v}$$



# Estimating Plate Angular Velocity

$$\begin{bmatrix} v_x \\ v_y \\ v_z \end{bmatrix} = \begin{bmatrix} 0 & Z & -Y \\ -Z & 0 & X \\ Y & -X & 0 \end{bmatrix} \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}$$
$$d = Gm$$

- ...
- Invert for  $m$ :

$$\begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix} = (G^T W G)^{-1} G^T W \vec{v}$$

- where the weight matrix  $W$  is the inverse of the velocity covariance matrix  $C_V$  (comes from processing)
- model covariance matrix is  $C_\omega = (G^T C_V^{-1} G)^{-1}$

# Estimating Plate Angular Velocity

- How many site velocities do you need?

# Estimating Plate Angular Velocity

- How many site velocities do you need?
- 3 parameters in plate angular velocity vector

# Estimating Plate Angular Velocity


- How many site velocities do you need?
- 3 parameters in plate angular velocity vector
- 3 data in each site velocity ( $v_N$ ,  $v_E$ ,  $v_U$ )
- But: plate model predicts no vertical - only horizontals count!

# Estimating Plate Angular Velocity

- How many site velocities do you need?
- 3 parameters in plate angular velocity vector
- 3 data in each site velocity ( $v_N$ ,  $v_E$ ,  $v_U$ )
- But: plate model predicts no vertical - only horizontals count!
- Need velocities for at least 2 sites to constrain plate angular velocity
- The more GPS velocities and the farther apart, the better determined is plate angular velocity

# Example: REVEL-2000


## REVEL-2000

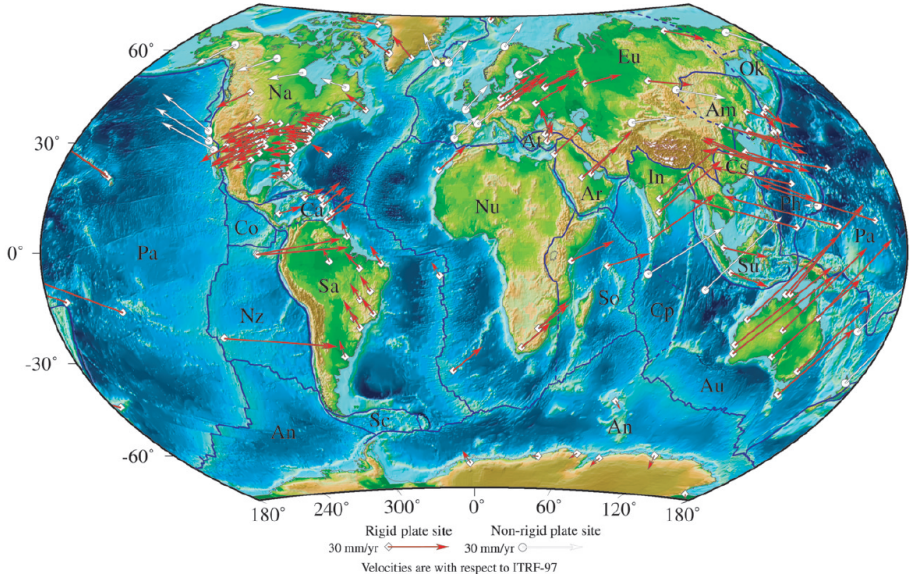

## Example: REVEL-2000

- REVEL = “recent velocities”
- Global plate motion model based entirely on GPS data for 19 plates
- Data from 1993 through 2000.
- combination of many continuous sites and repeat campaign survey data
- first model with essentially global coverage
- 2/3 of tested plate pairs agree within uncertainties with NUVEL-1A (geologic 3Myr average)

# Example: REVEL-2000

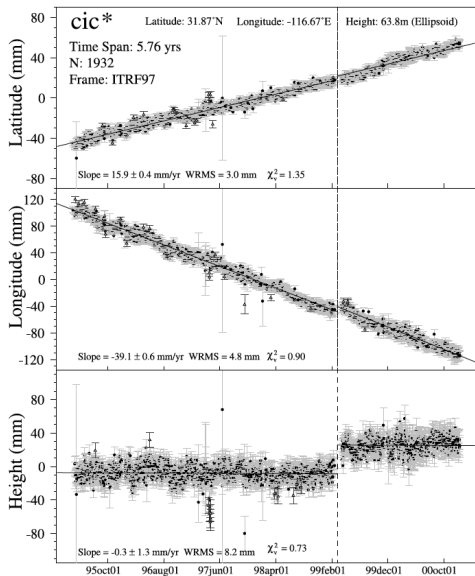

- example of data used in model
- long time series in ITRF97
- PPP solutions
- fit linear trends plus offset (here: combination of co-located sites)
- outlier rejection, quality control
- 345,000 station days



# Example: GEODVEL



*Argus et al., 2010, GJI*

Rotation poles and confidence ellipses for adjacent plate pairs for GEODVEL (open circles, yellow) and NUVEL-1A (open squares, violet)

## Example: GEODVEL

- GEODVEL = “GEODesy VELocity”
- based on GPS, VLBI, SLR, DORIS in ITRF2005
- relative angular velocities for 11 major plates
- also provides absolute plate poles

# Example: GEODVEL



- "Velocities with respect to PLATE-NAME"
- very convenient for visualization purposes and modeling of tectonic deformation
- To convert into plate-fixed frame we need plate motion and velocities in the same geodetic frame (e.g., ITRF2008)
- Transformation:

# Plate Fixed Reference Frames

- "Velocities with respect to PLATE-NAME"
- very convenient for visualization purposes and modeling of tectonic deformation
- To convert into plate-fixed frame we need plate motion and velocities in the same geodetic frame (e.g., ITRF2008)
- Transformation: subtract predicted motion based on plate angular velocity from observed velocity

# Reference Frames – ITRF vs. fixed (stable North America)




*courtesy: Jeff Freymueller, UAF*

# Reference Frames – stable North America



- extension across Basin and Range
- Shear on San Andreas System
- Subduction strain in Cascadia, Alaska
- et al.

# NOAM Poles

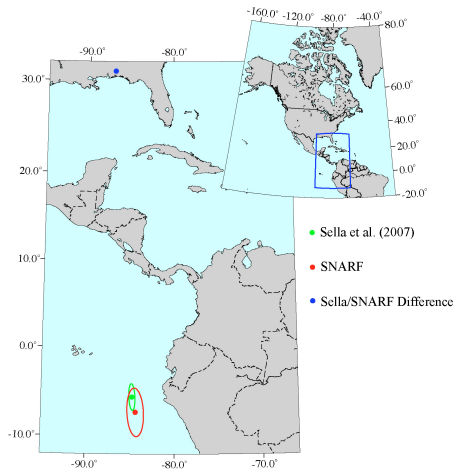


*courtesy: Jeff Freymueller, UAF*

- past studies: common that NOAM poles not within each others' confidence ellipses
- Difference between SNARF and Sella et al. (2007) is rotation about pole in SE US.




# Why is NOAM Pole poorly determined?

# Why is NOAM Pole poorly determined?

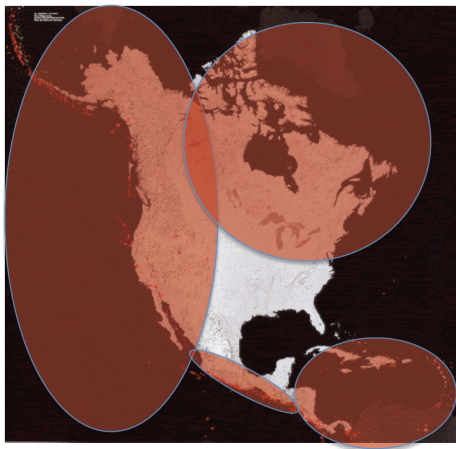

*courtesy: Jeff Freymueller, UAF*

# Why is NOAM Pole poorly determined?

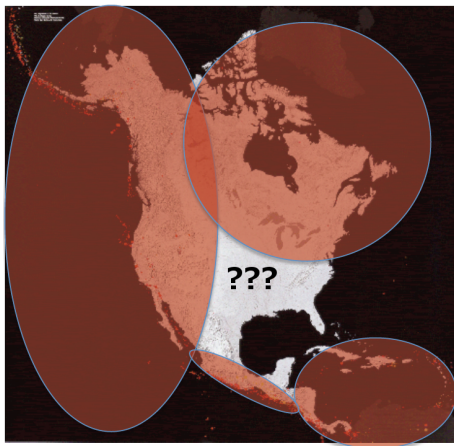

*courtesy: Jeff Freymueller, UAF*

- tectonics in western North America
- glacial isostatic adjustment in northern North America
- SE is thought to be stable on geologic and geodetic time scales
- limited area to determine plate angular velocity, susceptible to bias